



Deutsche
Qualität
Garantiert



N-TYPE TOPCON TECHNOLOGY

CME-132BDS 700W-720W

More power, less degradation

23.21%
MAXIMUM EFFICIENCY


132
HALF CELLS

30 YEARS
Performance Warranty


up to **30 YEARS***
Product Warranty

*The regular product warranty is 15 years, please refer to the latest version of AESOLAR Limited Warranty for the duration of the product warranty under special conditions. for extensions, please contact AESOLAR staff.

- LID
RESISTANT
- PID
RESISTANT
- SALT CORROSION
RESISTANT
- SAND
RESISTANT
- AMMONIA
RESISTANT
- HIGHLY STABLE
AND TOUGH

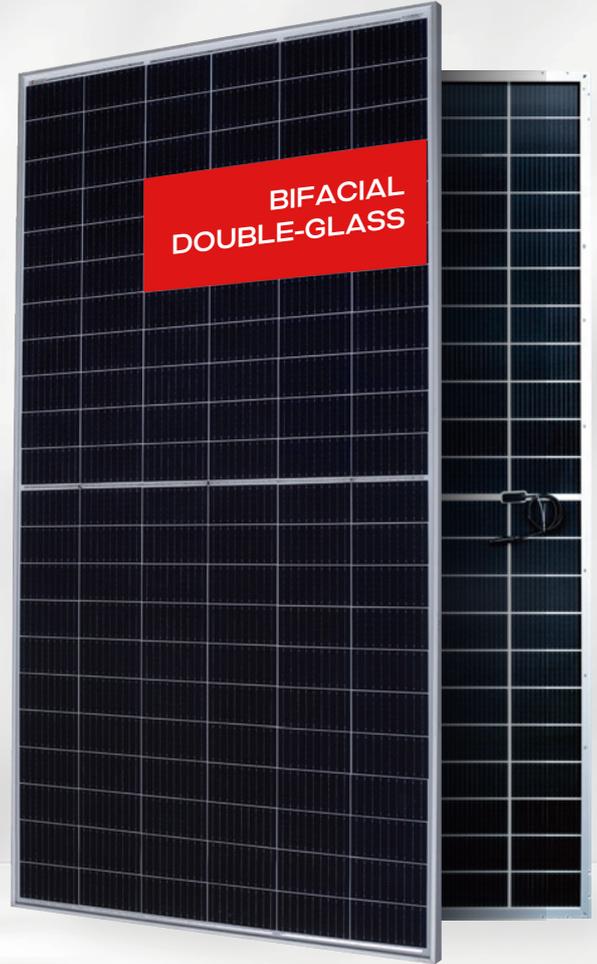

OUR PERFORMANCE WARRANTY

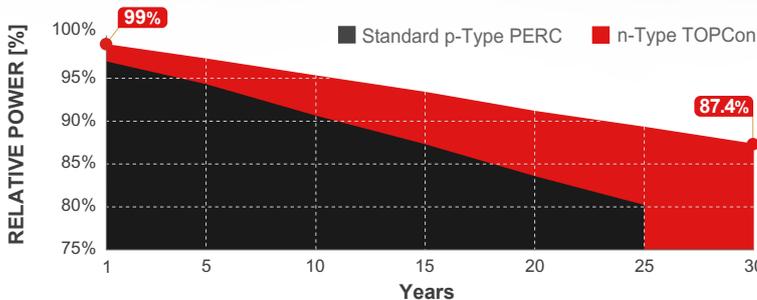

SYSTEM AND PRODUCT CERTIFICATIONS



IEC 61215 IEC 61730
Regular Production Surveillance
www.tuv.com
ID 1111257249

IEC 62716 (Ammonia corrosion)
IEC 61701 (Salt mist corrosion)
IEC 60068 (Sand and dust)
IEC 62804 (PID resistance)




www.ae-solar.com

AE CME-132BDS 700W-720W

N-TYPE TOPCON TECHNOLOGY PV MODULE

BIFACIAL • DOUBLE-GLASS

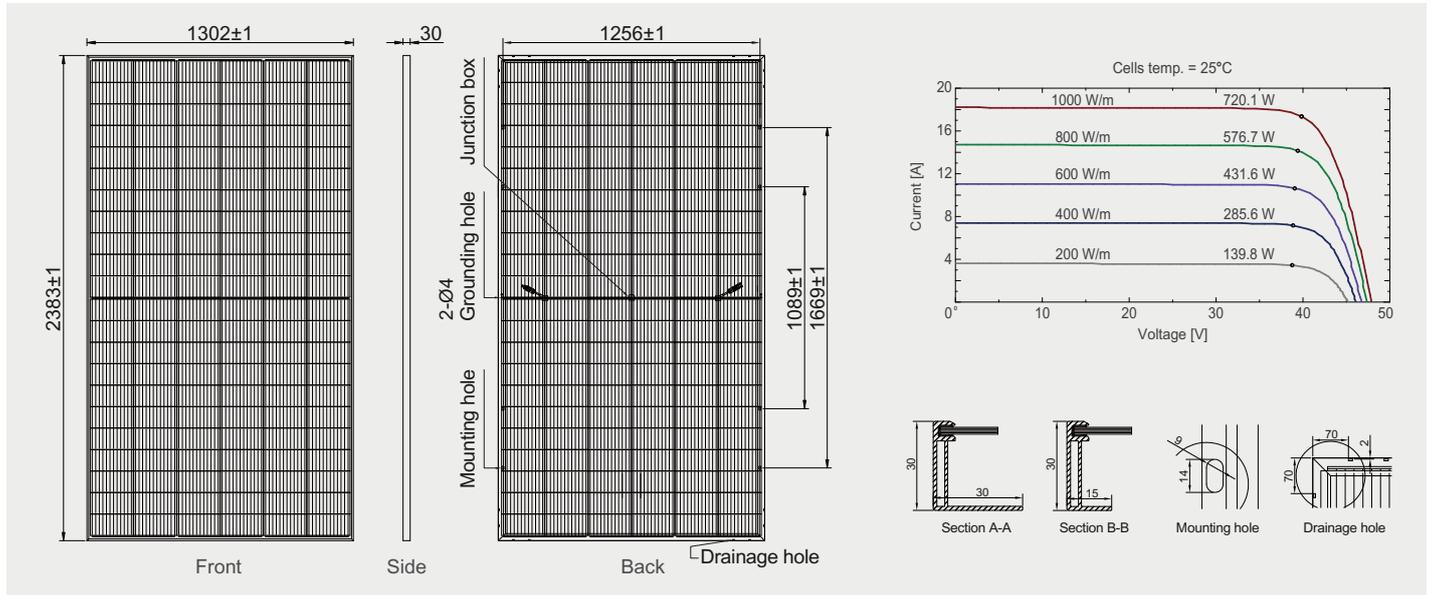

Electrical specifications (STC*):

Parameter	Symbol	700	705	700	715	720
Nominal max. power	P_{max} (Wp)	700	705	700	715	720
Maximum operating voltage	V_{MPP} (V)	40.52	40.70	40.90	41.10	41.30
Maximum operating current	I_{MPP} (A)	17.28	17.32	17.36	17.40	17.43
Open-circuit voltage	V_{oc} (V)	48.30	48.50	48.70	48.90	49.10
Short-circuit current	I_{sc} (A)	18.31	18.34	18.37	18.40	18.43
Module efficiency	η (%)	22.57	22.72	22.88	23.04	23.21
Power tolerance	(W)	0~+5				
Maximum system voltage	(V)	1500				
Maximum series fuse rating	(A)	30				

*STC: Standard Test Conditions (irradiance 1000 W/m, cell temperature 25 C and air mass of AM1.5), measurement tolerance P_{max} : $\pm 3\%$

Electrical specifications (NMOT*):

Parameter	Symbol	533	537	540	544	548
Nominal max. power	P_{max} (Wp)	533	537	540	544	548
Maximum operating voltage	V_{MPP} (V)	38.10	38.28	38.41	38.61	38.81
Maximum operating current	I_{MPP} (A)	14.00	14.03	14.06	14.09	14.12
Open-circuit voltage	V_{oc} (V)	45.80	46.00	46.20	46.40	46.60
Short-circuit current	I_{sc} (A)	14.79	14.82	14.85	14.88	14.91

*NMOT: Normal Module Operating Temperature (irradiance 800 W/m, ambient temperature 20 C, air mass of AM1.5 and wind speed of 1 m/s)

Bifacial electrical specifications

Parameter	700	705	710	715	720
Max. power front-side $P_{max front}$ (Wp)	700	705	710	715	720
Backside Power Gain	5% 10%	5% 10%	5% 10%	5% 10%	5% 10%
Total equivalent power $P_{max equ}$ (Wp)	735 770	740 776	746 781	751 787	756 792
Module efficiency η (%)	23.70 24.82	23.86 24.99	24.03 25.17	24.20 25.35	24.37 25.53

*Bifacial Gain: The additional gain from the back side compared to the power of the front side at the standard test condition. It depends on the mounting (structure, height, tilt angle, etc.) and albedo of the ground.

Mechanical and design specification

Cell type	n-Type TOPCon technology, half-cut cells
No. of cells	132
Bifaciality	80 \pm 5%
Front cover	2.0 mm glass, high transmission, AR coated, tempered
Encapsulation	POE
Back cover	2.0 mm white glazed glass, tempered
Junction box	IP68 rated, 3 bypass diodes
Frame	30 mm anodized aluminium alloy
Cable (Including Connector)	1 x 4 mm, 350 mm length or customized
Connectors	MC 4 / MC 4 compatible
Dimension	2383 mm x 1302 mm x 30 mm
Weight	37 kg
Hail resistance	Max. \varnothing 25 mm at 23 m/s
Wind load	2400 Pa or 244 kg/m
Snow load	5400 Pa or 550 kg/m
Fire rating	Class A (according to UL 790)

Temperature ratings

Operating temperature	-40 to +85 C
Temp. coefficient of P_{max}	-0.29 %/ C
Temp. coefficient of V_{oc}	-0.24 %/ C
Temp. coefficient of I_{sc}	0.040 %/ C
Nom. operating cell temp. NOCT	43 \pm 2 C

Packaging information

Packaging configuration	36 pcs / pallet
Loading capacity	648 pcs / 40 HQ
Size / Pallet	1350 mm x 1140 mm x 2500 mm (Upright)
Weight	1364 kg / pallet

The specifications and characteristics contained in this datasheet may deviate slightly from our actual products due to the product developments and uncertainty of measurement devices. The specifications included in the datasheet are subject to change without prior notice.



+49 8231 978268 0
sales@ae-solar.com
www.ae-solar.com

AESOLAR
Messerschmitttring 54
86343 Königsbrunn, Germany