


SMARTGUARD

Model: SmartGuard-63A-S0

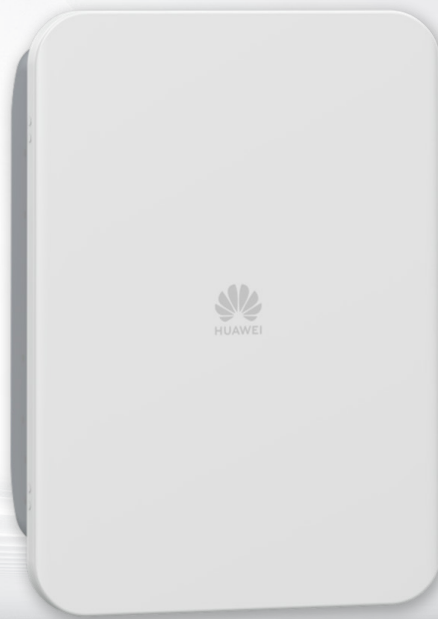

Simple

Whole home backup,
no need of additional
switchboard



Seamless

≤ 20 ms ultra-fast switchover to
power backup mode



Reliable

Provide bypass mode
when a fault occurs



Intelligent¹

Intelligent load control with
built-in SA4H-A02

SmartGuard-63A-S0 Technical Specifications

Technical Specification	SmartGuard-63A-S0
General Data	
Dimensions (W x H x D)	355 mm × 485 mm × 150 mm
Weight	≤14 kg
Performance	
AC Voltage (nominal)	220/230/240 V L/N+PE
Max. current (from Grid)	63 A
Max. current (from Inverter)	60 A
Max. current (to backed-up load)	63 A
Max. current (to non-backed-up load) ²	63 A
Self consumption	10 W
Low-voltage ride-through	Supported
Switchover time	≤ 20 ms (in Seamless Mode)
Bypass operation mode	Manual
Interface	
Power output	9.5–13.2V @ 100mA, ≤ 3m
LAN	10/100 Mbps, ≤ 100 m
WAN	10/100 Mbps, ≤ 100m
WLAN	AP Mode, 802.11b/g/n (2.412 GHz–2.484 GHz)
RS485	9600/19200/115200 bps, × 2, ≤ 50m
Digital input	×2, ≤ 20 m
Digital output	×2, ≤ 20 m
Measurement Range	
Current range	≤ 63 A
Voltage range	1P (L-N): 85–299 V AC
Energy accuracy	± 1%
Device Management	
Smart energy controllers	up to 1
Smart chargers	up to 2
Heat pump	up to 1 ³
Shelly device	up to 20
Environment	
Noise emission	≤ 29 dBA
Cooling	Natural Convection
Relative humidity range	5%-95% RH (non condensing)
Max. operating altitude	4000m (derated over 2000m)
IP rating	IP55
Operating temperature range	-25°C–50°C ⁴
Compatible Device	
Smart energy controller	SUN2000-2-6KTL-L1, SUN2000-3/3.68/4/4.6/5/6K-LB0, SUN2000-8-10K-LC0
Smart charger	SCharger-7KS-S0
Heat pump	SG-ready
Shelly device	Shelly Plus Plug S, Shelly Plus 2PM, Shelly Pro 2PM ⁵

*1 The intelligent energy scheduling feature is available for a 2-year free trial. After the trial, it will be available at no more than €99 per site per year.

*2 The sum of the output current of the backup port and the non-backup port could not be more than 63A

*3 1 SG-ready Heat Pump can be connected directly. Others can be connected via shelly devices

*4 On-grid Mode: 25–30 °C, no derating; 30–40 °C, linear derating from 63A to 50A; 40–50 °C, linear derating from 50A to 40A

Off-grid Mode: 25–40 °C, no derating; 40–50 °C, linear derating from 54.5A to 50A

*5 The supported firmware version of shelly devices can be found in user manual

Disclaimer: The preceding values are measured by an internal laboratory of Huawei in a specific environment. The actual values may vary with products, software versions, usage conditions, and environmental factors.